

0745/01

Premier Plant Hire

Phone: 020 7326 0000 Fax: 020 7274 1555

www.premierplanthire.co.uk

Garden Roller

Water Fillable

BASIC SAFETY

Before using this equipment and to avoid personal injury, carefully read and understand these instructions. If there is anything you do not understand, DO NOT use this equipment, contact the hire company for advice.

Make sure you are aware of all safety requirements and that this equipment is suitable for the task you wish to undertake.

The work area must be cordoned off from the general public and bystanders.

This equipment must not be used by persons who are under the influence of alcohol or drugs. Do not use this equipment if you are tired or unwell.

This equipment must only be used by persons who are medically fit to do so. If you have any medical condition, are recovering from any medical condition or suffer from any mental or physical disability, you MUST seek professional medical advice before using this equipment.

You MUST perform a risk assessment before using this equipment to ensure your safety and the safety of others.

Wear the correct Personal Protective Equipment for the task ahead.



Steel toecap boots must be worn when using this equipment.

Do not wear loose jewellery or clothing that may get in the way or become trapped in the equipment. Tie back long hair.




When empty, this equipment weighs approximately 13KG. When full of water, its weight to greater than 60KG, do not attempt to lift it.

The Garden Roller is heavy and can cause serious injury keep hands and feet clear of the underside of the unit.

Inform everyone in the work area of what you are doing.

SAFETY & OPERATING GUIDE

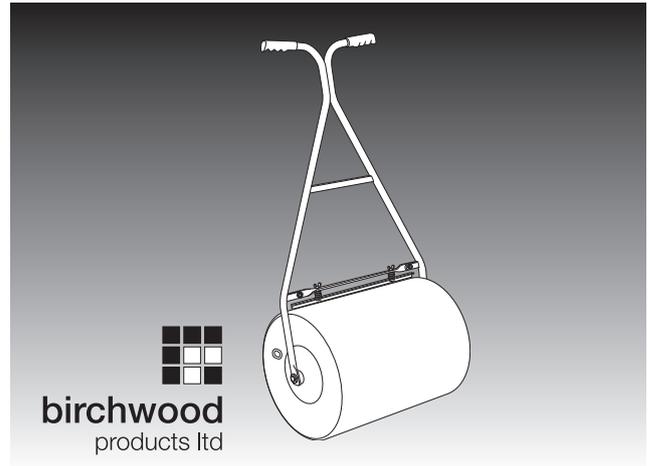

Carefully inspect the equipment before use, if there is any doubt about its condition, DO NOT USE IT.

PREPARATION

To roll an area of soil/lawn, the ground must be in a suitable condition, neither too dry or too wet.

This equipment is not suitable for rolling areas which have large stones close to the top surface. Always check the area for hidden obstructions such as bricks and discarded metal.

Prior to using this equipment, it is advisable to inspect and prepare the area to be worked on.

Clear the area of any debris or moveable obstacle which could either damage the Garden Roller or hinder your progress.

Pay careful attention to head height obstacles such as washing lines or low branches.

If rolling a lawn, it must firstly be cut and cleared to allow the Garden Roller to work properly.

SETTING UP

The Garden Roller must be filled with water before use.

It is best to fill the Roller when positioned on soil/lawn rather than on a hard surface such as a path or drive. Once full, the Roller's surface will be damaged if moved over a hard surface.

Place the Roller on the soil/lawn, turn it on its side with the filler plug upper most.

The plug requires no special tools just a suitable implement to slot into it, the handle of an adjustable spanner for instance.

Remove the plug by turning anticlockwise and place somewhere safe.


Ideally, using a garden hose, fill the Garden Roller with fresh clean water.

Once full, replace the filler plug ensuring that the plug seal ring is present, securing hand tight.

Taking care, lower the Garden Roller onto the soil/lawn.

0745/01 GARDEN ROLLER – WATER FILLABLE

OPERATING THE GARDEN ROLLER

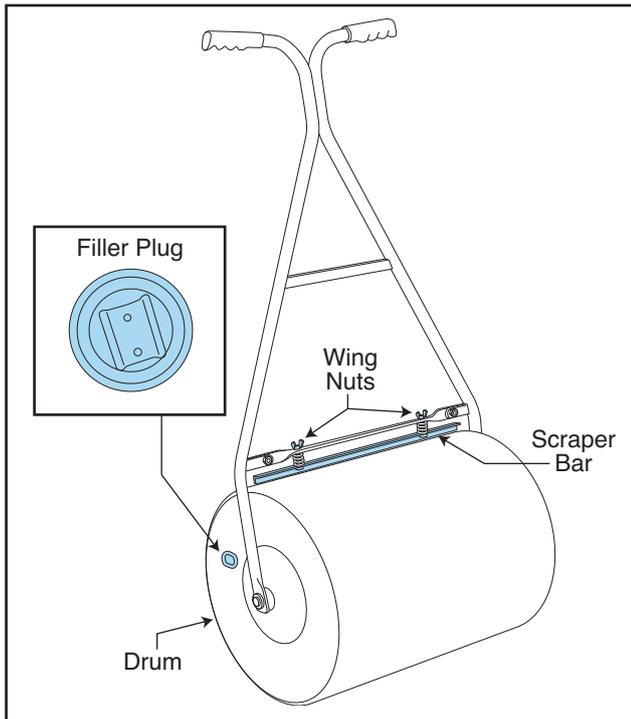

Simply walk the roller over the soil/lawn until the task is complete.

Adjust the scraper as required, if no soil deposits adhere to the drum, the scraper can be adjusted clear to reduce noise when moving. Simply turn the wing nuts clockwise to raise the scraper clear.

Always adjust the scraper evenly so that it is an equal distance along its length

If the Garden Roller is compressing the surface too much, you should reduce the quantity of water in the drum.

EQUIPMENT MAINTENANCE & CLEANING

Regularly clean the Garden Roller's outer surface of mud deposits.

When not being used, store the unit in a clean condition and in a safe place away from thieves and unauthorised users.

FINALLY

Carefully remove the filler plug and allow the drum to empty. Once empty, replace the plug then give everything a thorough clean ready for return.

NOTE

Failure to clean the equipment thoroughly may make you liable to a cleaning charge.